



WatchGuard® Model	Firebox M495	Firebox M595	Firebox M695
Ideal For	500 Users	850 Users	1250 Users
<b>Performance</b>			
UTM (Full Scan)	6.3 Gbps	7.2 Gbps	10.2 Gbps
Firewall (UDP 1518)	37 Gbps	43 Gbps	45 Gbps
VPN (UDP 1518)	10 Gbps	11.5 Gbps	13 Gbps
VPN (IMIX)	3 Gbps	3.5 Gbps	4 Gbps
AntiVirus	6.3 Gbps	7.6 Gbps	11.5 Gbps
IPS (Full Scan)	7.4 Gbps	9.4 Gbps	10.8 Gbps
HTTPS (Full Scan)	3.5 Gbps	4.8 Gbps	5.2 Gbps
<b>VPN Tunnels</b>			
Branch Office VPN Tunnels	800	1200	2000
Mobile VPN	800	1200	2000
<b>Hardware</b>			
Network Interfaces & Modules	2.5Gbps RJ45 x 12, 10Gbps RJ45 x 2, 1Gbps SFP x 2, 10Gbps SFP+ x 2	2.5Gbps RJ45 x 12, 10Gbps RJ45 x 2, 1Gbps SFP x 2, 10Gbps SFP+ x 4	2.5Gbps RJ45 x 12, 10Gbps RJ45 x 2, 1Gbps SFP x 4, 10Gbps SFP+ x 4
Wireless Models	N/A	N/A	N/A
<b>Networking Features</b>			
VLAN	Unrestricted	Unrestricted	Unrestricted
SD-WAN Dynamic Path Selection	✓	✓	✓

# Firebox M495

Delivers fast, secure connectivity with SD-WAN, high availability (HA), and scalable BOVPN capacity for up to 800 sites.



## High-Performance Protection for Distributed Enterprises

The Firebox M495 delivers 6.3 Gbps UTM throughput, 3.5 Gbps HTTPS inspection, and supports up to 500 users. Ideal for larger branch sites or midsize headquarters, it balances strong performance with comprehensive security services.

*WatchGuard Network Security has been my go to solution for firewalls and WAN security for many years. I like the scalability of the devices and the licensing options. I appreciate the different licensing options for the solutions including the different add on services for increased security offerings like botnet scanning, IPS, gateway a/v, etc.*

~Mike Broseus

IT Manager, Advanced Business Communications Inc

### Firebox M495 Technical Specifications


<b>Throughput <sup>1</sup></b>	
UTM (full scan) <sup>2</sup>	6.30 Gbps
VPN (IMIX)	3.00 Gbps
HTTPS (IPS enabled, full scan)	3.50 Gbps
Antivirus	6.30 Gbps
IPS (full scan)	7.40 Gbps
Firewall (UDP 1518)	37.00 Gbps
VPN (UDP 1518)	16.20 Gbps
<b>Capacity</b>	
Network Interfaces	2.5 Gbps RJ45 x 12, 10 Gbps RJ45 x 2, 1 Gbps SFP x 2, 10 Gbps SFP+ x 2
I/O interfaces	1 Serial/2 USB-A 3.2
Concurrent connections	6,000,000
Concurrent connections (proxy)	340,000
New connections per second	152,000
VLANs	Unrestricted
WSM licenses (incl)	4
EDR Core Sensors included	150
<b>VPN Tunnels</b>	
Branch Office VPN	800
Mobile VPN	800
<b>Firewall</b>	
Application proxies	Stateful packet inspection, TLS decryption, proxy firewall
Threat protection	HTTP, HTTPS, FTP, DNS, TCP/UDP, POP3S, SMTPS, IMAPS, and Explicit Proxy
Filtering options	DoS attacks, fragmented & malformed packets, blended threats
VPN	Browser Safe Search, Google for Business
<b>VPN</b>	
Site to Site VPN	KEv2, IPSec, Policy and Route Based Tunnels, TLS hub and spoke
Remote Access VPN	IKEv2, IPSec, L2TP, TLS
<b>Visibility</b>	
Logging and notifications	WatchGuard Cloud & Dimension, Syslog, SNMP v2/v3
Reporting	WatchGuard Cloud includes over 100 pre-defined reports, executive summary, and visibility tools

## Firebox M495 Technical Specifications

Certifications	
Security	Pending: CC, FIPS 140-3
Safety	NRTL/CB
Network	IPv6 Ready Gold (routing)
Hazardous substance control	WEEE, RoHS, REACH
Networking	
SD-WAN	Multi-wan failover, dynamic path selection, jitter/loss/latency measurement
Dynamic Routing	RIP, OSPF, BGP
High Availability	Active/Passive, Active/Active
QoS	802.1Q, DSCP, IP Precedence
Traffic Management	By policy or application
IP address assignment	Static, DHCP (server, client, relay), PPPoE, DynDNS
NAT	Static, dynamic, 1:1, IPSec traversal, policy-based
Link aggregation	802.3ad dynamic, static, active/backup

### Physical and Power Specifications

Product Dimensions	17.3" x 12.2" x 1.73" (440 x 310 x 44 mm)	
Shipping Dimension	21.75" x 20" x 5.25" (552.45 x 508 x 185.85 mm)	
Product Weight	10.8 lbs (4.90 kg)	
Shipping Weight	15.1 lbs (6.86 kg)	
Power Consumption	148 W (Max)	
Power	1x C14 inlet (90-264VAC) 1x CRPS slot (optional)	
Environment	Operating	Storage
Temperature	32° F to 104° F 0° C to 40° C	14° to 158° F -10° to 70° C
Relative Humidity	5% to 90% non-condensing	5% to 90% non-condensing
Altitude	0 to 9,843 ft at 95° F (3,000 m at 35° C)	0 to 15,000 ft at 95° F (4,570 m at 35° C)
MTBF	315,291 hours	

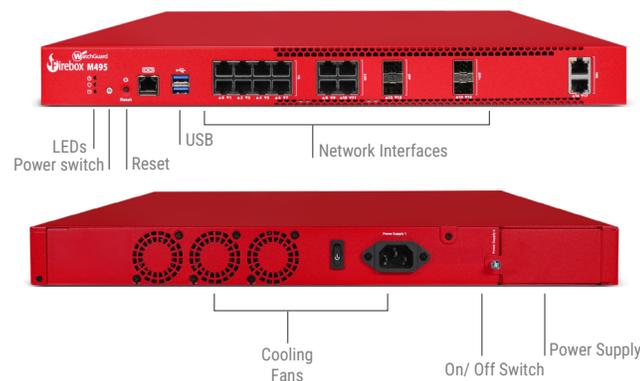

## Strong Security at Every Layer

Uniquely architected to be the industry's smartest, fastest, and most effective network security products, WatchGuard solutions deliver in-depth defenses against advanced malware, ransomware, botnets, trojans, viruses, drive-by downloads, data loss, phishing, and much more.

<sup>1</sup> Throughput rates are determined using multiple flows through multiple ports and will vary depending on the environment and configuration. Max firewall throughput tested via direct connection using 1518-byte UDP frames based on RFC 2544 methodology. All testing performed on Fireware version 2025.1.

<sup>2</sup> UTM throughput is measured using HTTP traffic with AV, IPS, and Application Control enabled, and does not account for all security services available on the appliance.

Contact your WatchGuard reseller or call WatchGuard directly (1.800.734.9905) for help determining the right model for your network. Visit [www.watchguard.com/sizing](http://www.watchguard.com/sizing) to access the online Product Sizing Tool.

For details, talk to your authorized WatchGuard reseller or visit [www.watchguard.com](http://www.watchguard.com).

	Standard Support	Basic Security	Total Security
Stateful Firewall	✓	✓	✓
VPN	✓	✓	✓
SD-WAN	✓	✓	✓
Access Portal*	✓	✓	✓
Intrusion Prevention Service (IPS)		✓	✓
Application Control		✓	✓
WebBlocker		✓	✓
spamBlocker		✓	✓
Gateway AntiVirus		✓	✓
Reputation Enabled Defense		✓	✓
Network Discovery		✓	✓
APT Blocker			✓
DNSWatch			✓
IntelligentAV*			✓
ThreatSync (XDR)			✓
EDR Core			✓
WatchGuard Cloud			
Log Data Retention		90 Days	365 Days
Report Data Retention		1 Day	30 Days
Support	Standard (24 x 7)	Standard (24 x 7)	Gold (24 x 7)

\*Not available on Firebox T115-W, T25/T25-W, or T35-R.

Total Security Suite required for M295, M395, M495, M595, M695, FireboxV and Firebox Cloud.

# Firebox M595



Supports 43 Gbps firewall throughput, 1,200 VPN tunnels, and advanced threat protection for enterprise agility in high-demand environments.

## Enterprise-Class Security with Room to Grow

With 7.2 Gbps UTM throughput, 4.8 Gbps HTTPS inspection, and capacity for up to 1,200 users, the Firebox M595 is built for demanding enterprise environments. Its performance and scalability make it a future-ready choice for distributed networks.

*WatchGuard Network Security has been my go to solution for firewalls and WAN security for many years. I like the scalability of the devices and the licensing options. I appreciate the different licensing options for the solutions including the different add on services for increased security offerings like botnet scanning, IPS, gateway a/v, etc.*

~Mike Broseus

IT Manager, Advanced Business Communications Inc


### Firebox M595 Technical Specifications

<b>Throughput <sup>1</sup></b>	
UTM (full scan) <sup>2</sup>	7.20 Gbps
VPN (IMIX)	3.50 Gbps
HTTPS (IPS enabled, full scan)	4.80 Gbps
Antivirus	7.60 Gbps
IPS (full scan)	9.40 Gbps
Firewall (UDP 1518)	43.00 Gbps
VPN (UDP 1518)	19.80 Gbps
<b>Capacity</b>	
Network Interfaces	2.5 Gbps RJ45 x 12, 10 Gbps RJ45 x 2, 1 Gbps SFP x 2, 10 Gbps SFP+ x 4
I/O interfaces	1 Serial/2 USB-A 3.2
Concurrent connections	15,000,000
Concurrent connections (proxy)	780,000
New connections per second	212,000
VLANs	Unrestricted
WSM licenses (incl)	4
EDR Core Sensors included	250
<b>VPN Tunnels</b>	
Branch Office VPN	1200
Mobile VPN	1200
<b>Firewall</b>	
Application proxies	Stateful packet inspection, TLS decryption, proxy firewall
Threat protection	HTTP, HTTPS, FTP, DNS, TCP/UDP, POP3S, SMTPS, IMAPS, and Explicit Proxy
Filtering options	DoS attacks, fragmented & malformed packets, blended threats
VPN	Browser Safe Search, Google for Business
<b>VPN</b>	
Site to Site VPN	KEv2, IPSec, Policy and Route Based Tunnels, TLS hub and spoke
Remote Access VPN	IKEv2, IPSec, L2TP, TLS
<b>Visibility</b>	
Logging and notifications	WatchGuard Cloud & Dimension, Syslog, SNMP v2/v3
Reporting	WatchGuard Cloud includes over 100 pre-defined reports, executive summary, and visibility tools

## Firebox M595 Technical Specifications

Certifications	
Security	Pending: CC, FIPS 140-3
Safety	NRTL/CB
Network	IPv6 Ready Gold (routing)
Hazardous substance control	WEEE, RoHS, REACH
Networking	
SD-WAN	Multi-wan failover, dynamic path selection, jitter/loss/latency measurement
Dynamic Routing	RIP, OSPF, BGP
High Availability	Active/Passive, Active/Active
QoS	802.1Q, DSCP, IP Precedence
Traffic Management	By policy or application
IP address assignment	Static, DHCP (server, client, relay), PPPoE, DynDNS
NAT	Static, dynamic, 1:1, IPSec traversal, policy-based
Link aggregation	802.3ad dynamic, static, active/backup

Physical and Power Specifications		
Product Dimensions	17.3" x 12.2" x 1.73" (440 x 310 x 44 mm)	
Shipping Dimension	21.75" x 20" x 5.25" (552.45 x 508 x 185.85 mm)	
Product Weight	10.8 lbs (4.90 kg)	
Shipping Weight	15.25 lbs (6.93 kg)	
Power Consumption	171 W (Max)	
Power	1x C14 inlet (90-264VAC) 1x CRPS slot (optional)	
Environment	Operating	Storage
Temperature	32° F to 104° F 0° C to 40° C	14° to 158° F -10° to 70° C
Relative Humidity	5% to 90% non-condensing	5% to 90% non-condensing
Altitude	0 to 9,843 ft at 95° F (3,000 m at 35° C)	0 to 15,000 ft at 95° F (4,570 m at 35° C)
MTBF	311,912 hours	

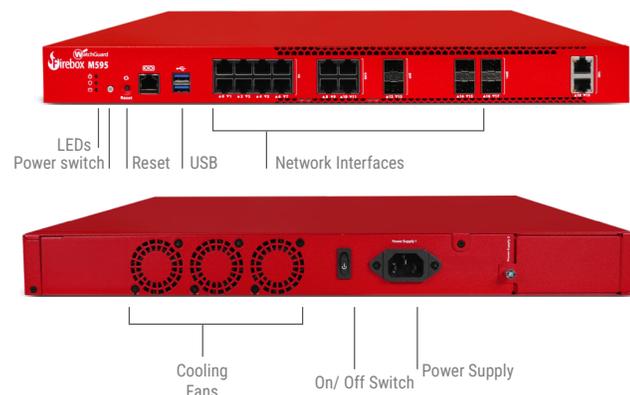

### Strong Security at Every Layer

Uniquely architected to be the industry's smartest, fastest, and most effective network security products, WatchGuard solutions deliver in-depth defenses against advanced malware, ransomware, botnets, trojans, viruses, drive-by downloads, data loss, phishing, and much more.

<sup>1</sup> Throughput rates are determined using multiple flows through multiple ports and will vary depending on the environment and configuration. Max firewall throughput tested via direct connection using 1518-byte UDP frames based on RFC 2544 methodology. All testing performed on Fireware version 2025.1.

<sup>2</sup> UTM throughput is measured using HTTP traffic with AV, IPS, and Application Control enabled, and does not account for all security services available on the appliance.

Contact your WatchGuard reseller or call WatchGuard directly (1.800.734.9905) for help determining the right model for your network. Visit [www.watchguard.com/sizing](http://www.watchguard.com/sizing) to access the online Product Sizing Tool.

For details, talk to your authorized WatchGuard reseller or visit [www.watchguard.com](http://www.watchguard.com).

	Standard Support	Basic Security	Total Security
Stateful Firewall	✓	✓	✓
VPN	✓	✓	✓
SD-WAN	✓	✓	✓
Access Portal*	✓	✓	✓
Intrusion Prevention Service (IPS)		✓	✓
Application Control		✓	✓
WebBlocker		✓	✓
spamBlocker		✓	✓
Gateway AntiVirus		✓	✓
Reputation Enabled Defense		✓	✓
Network Discovery		✓	✓
APT Blocker			✓
DNSWatch			✓
IntelligentAV*			✓
ThreatSync (XDR)			✓
EDR Core			✓
WatchGuard Cloud			
Log Data Retention		90 Days	365 Days
Report Data Retention		1 Day	30 Days
Support	Standard (24 x 7)	Standard (24 x 7)	Gold (24 x 7)

\*Not available on Firebox T115-W, T25/T25-W, or T35-R.

Total Security Suite required for M295, M395, M495, M595, M695, FireboxV and Firebox Cloud.

# Firebox M695

Uncompromising speed and security with 45 Gbps firewall throughput, 2,000 VPN tunnels, and enterprise-grade threat protection.



## Maximum Performance for Mission-Critical Networks

At the top of the M Series lineup, the Firebox M695 delivers 10.2 Gbps UTM throughput, 5.2 Gbps HTTPS inspection, and supports up to 2,000 users. Designed for organizations that can't compromise on speed or security, it ensures peak protection and performance in the most demanding environments.

*WatchGuard Network Security has been my go to solution for firewalls and WAN security for many years. I like the scalability of the devices and the licensing options. I appreciate the different licensing options for the solutions including the different add on services for increased security offerings like botnet scanning, IPS, gateway a/v, etc.*

~Mike Broseus

IT Manager, Advanced Business Communications Inc


### Firebox M695 Technical Specifications

<b>Throughput <sup>1</sup></b>	
UTM (full scan) <sup>2</sup>	10.20 Gbps
VPN (IMIX)	4.00 Gbps
HTTPS (IPS enabled, full scan)	5.20 Gbps
Antivirus	11.50 Gbps
IPS (full scan)	10.80 Gbps
Firewall (UDP 1518)	45.00 Gbps
VPN (UDP 1518)	23.20 Gbps
<b>Capacity</b>	
Network Interfaces	2.5 Gbps RJ45 x 12, 10 Gbps RJ45 x 2, 1 Gbps SFP x 4, 10 Gbps SFP+ x 4
I/O interfaces	1 Serial/2 USB-A 3.2
Concurrent connections	30,000,000
Concurrent connections (proxy)	780,000
New connections per second	245,000
VLANs	Unrestricted
WSM licenses (incl)	4
EDR Core Sensors included	250
<b>VPN Tunnels</b>	
Branch Office VPN	2,000
Mobile VPN	2,000
<b>Firewall</b>	
Application proxies	Stateful packet inspection, TLS decryption, proxy firewall
Threat protection	HTTP, HTTPS, FTP, DNS, TCP/UDP, POP3S, SMTPS, IMAPS, and Explicit Proxy
Filtering options	DoS attacks, fragmented & malformed packets, blended threats
VPN	Browser Safe Search, Google for Business
<b>VPN</b>	
Site to Site VPN	KEv2, IPSec, Policy and Route Based Tunnels, TLS hub and spoke
Remote Access VPN	IKEv2, IPSec, L2TP, TLS
<b>Visibility</b>	
Logging and notifications	WatchGuard Cloud & Dimension, Syslog, SNMP v2/v3
Reporting	WatchGuard Cloud includes over 100 pre-defined reports, executive summary, and visibility tools

## Firebox M695 Technical Specifications

Certifications	
Security	Pending: CC, FIPS 140-3
Safety	NRTL/CB
Network	IPv6 Ready Gold (routing)
Hazardous substance control	WEEE, RoHS, REACH
Networking	
SD-WAN	Multi-wan failover, dynamic path selection, jitter/loss/latency measurement
Dynamic Routing	RIP, OSPF, BGP
High Availability	Active/Passive, Active/Active
QoS	802.1Q, DSCP, IP Precedence
Traffic Management	By policy or application
IP address assignment	Static, DHCP (server, client, relay), PPPoE, DynDNS
NAT	Static, dynamic, 1:1, IPSec traversal, policy-based
Link aggregation	802.3ad dynamic, static, active/backup

Physical and Power Specifications		
Product Dimensions	17.3" x 12.2" x 1.73" (440 x 310 x 44 mm)	
Shipping Dimension	21.75" x 20" x 5.25" (552.45 x 508 x 185.85 mm)	
Product Weight	10.8 lbs (4.90 kg)	
Shipping Weight	15.35 lbs (6.98 kg)	
Power Consumption	237 W (Max)	
Power	1x C14 inlet (90-264VAC) 1x CRPS slot (optional)	
Environment	Operating	Storage
Temperature	32° F to 104° F 0° C to 40° C	14° to 158° F -10° to 70° C
Relative Humidity	5% to 90% non-condensing	5% to 90% non-condensing
Altitude	0 to 9,843 ft at 95° F (3,000 m at 35° C)	0 to 15,000 ft at 95° F (4,570 m at 35° C)
MTBF	315,291 hours	

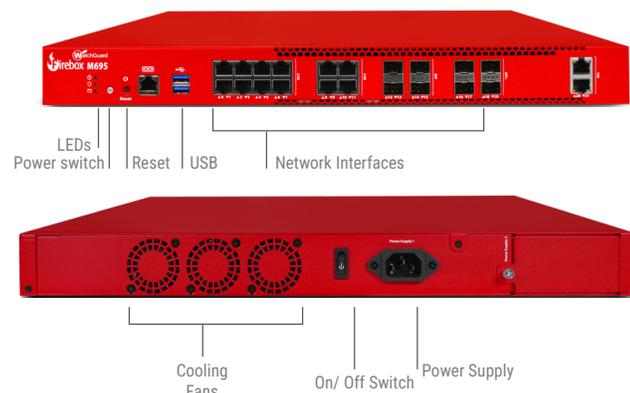

### Strong Security at Every Layer

Uniquely architected to be the industry's smartest, fastest, and most effective network security products, WatchGuard solutions deliver in-depth defenses against advanced malware, ransomware, botnets, trojans, viruses, drive-by downloads, data loss, phishing, and much more.

<sup>1</sup> Throughput rates are determined using multiple flows through multiple ports and will vary depending on the environment and configuration. Max firewall throughput tested via direct connection using 1518-byte UDP frames based on RFC 2544 methodology. All testing performed on Fireware version 2025.1.

<sup>2</sup> UTM throughput is measured using HTTP traffic with AV, IPS, and Application Control enabled, and does not account for all security services available on the appliance.

Contact your WatchGuard reseller or call WatchGuard directly (1.800.734.9905) for help determining the right model for your network. Visit [www.watchguard.com/sizing](http://www.watchguard.com/sizing) to access the online Product Sizing Tool.

For details, talk to your authorized WatchGuard reseller or visit [www.watchguard.com](http://www.watchguard.com).

	Standard Support	Basic Security	Total Security
Stateful Firewall	✓	✓	✓
VPN	✓	✓	✓
SD-WAN	✓	✓	✓
Access Portal*	✓	✓	✓
Intrusion Prevention Service (IPS)		✓	✓
Application Control		✓	✓
WebBlocker		✓	✓
spamBlocker		✓	✓
Gateway AntiVirus		✓	✓
Reputation Enabled Defense		✓	✓
Network Discovery		✓	✓
APT Blocker			✓
DNSWatch			✓
IntelligentAV*			✓
ThreatSync (XDR)			✓
EDR Core			✓
WatchGuard Cloud			
Log Data Retention		90 Days	365 Days
Report Data Retention		1 Day	30 Days
Support	Standard (24 x 7)	Standard (24 x 7)	Gold (24 x 7)

\*Not available on Firebox T115-W, T25/T25-W, or T35-R.

Total Security Suite required for M295, M395, M495, M595, M695, FireboxV and Firebox Cloud.